



Removal

- 1 . Open the glove compartment to the service condition.
 - ▶ Release the glove compartment latch stops.

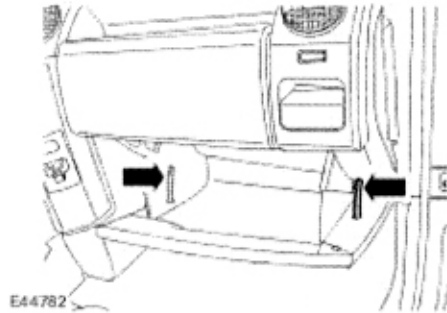

- 2 . Remove the pollen filter housing cover.

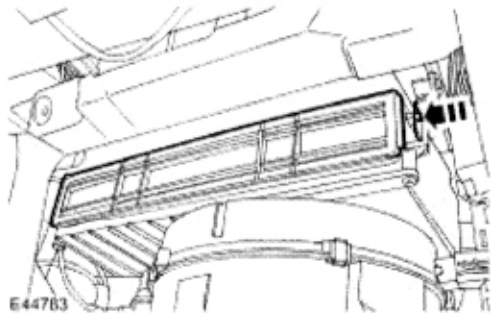

- 3 . Remove the pollen filter.

Installation

- 1 . To install, reverse the removal procedure.