



Remove the radiator grill, this allows access to the bumper bolts.

Remove the three screws holding the lower bumper valance to the support bar.

Remove the bumper bolts and discard the bumper support bar.


Replace the upper bumper bolts.

Remove the upper front steering box bolt; you may have to jack the chassis up if your vehicle has ACE. (See photo right)



Mount the R/H plate (with return pointing inward) this mounts using the lower bumper bolt and the front upper steering box bolt. (See photo left)

Leave these loose for now.

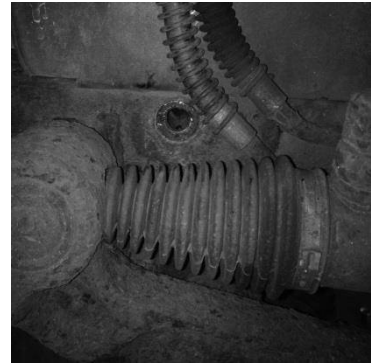

Mount the L/H plate; again with the lower bumper bolt and the front upper bolt hole (behind the plastic access plate) use the M12 x 100 in this hole.

Although it's tight it is possible to get the washer and nut on. (Photo on right viewed from underneath)





Next offer up the main blade and bolt up using the button head bolts in the six rear-most bolt holes.

Use the short hex head bolts in the front holes as it's easier to get in with a spanner when holding them.

Centre the guard checking it is even at both sides and in line with the rear of each of the side plates.

Fully tighten all bolts starting with the blade bolts first, then working up to the side plate mounting bolts.



Finally you need to secure the lower valance there are two ways to do it one is to use a drill with an 8mm socket attachment and simply drill the screw through the blade or if you don't have that facility then drill a 3mm hole through the guard and then drive the self drilling screws through the plate with the ratchet and 8mm socket.





WARRANTY & DISCLAIMER - TerrafirMa products are warranted free from defects in materials and workmanship for a period of 12 months from the date of retail invoice. TerrafirMa does not warrant that the products manufactured or marketed by it comply with the laws of the country where those goods are purchased or used. It is the sole responsibility of the purchaser to ascertain whether products being purchased, or the fitting of those products to any other object, comply with local laws. This warranty covers structural defect and workmanship but does not cover finishes, labour charges for removal or refitting, freight costs, accident damage, misuse or abuse, damage due to incorrect or improper fitting or application, modified product, faulty design or consequential damage of any kind. Damage or defects caused by collision, alteration, improper installation, road hazards, adverse conditions or usage for any other purpose other than normal private usage are not covered by this warranty. TerrafirMa shall not be liable for any other claim relating to the use of the product and any indirect special or consequential damage or injury to any person, company or other entity. All claims must be accompanied by the original retail invoice and should be submitted to the supplying Allmakes 4x4/TerrafirMa distributor. This warranty covers only the replacement of the product or part concerned. The decision remains solely at the discretion of Allmakes Ltd. The information contained in this catalogue was correct at the time of going to press. Allmakes/TerrafirMa and its associated companies reserve the right to alter the range and any product specifications without notice. Always consult your Allmakes/TerrafirMa distributor for the latest product information and specifications. The TerrafirMa range of products is constantly being evaluated for enhancement and improvement to make sure the level of quality and performance is as expected.